

Building Details

Building Name: Scott Theatre Building No: NT44	Date of Inspection: 03-08-2023	Risk
	Keys required: Plant key, building key (roof space) Security can only open (roof access).	Medium

Roof Access Details

- Right of Access Permit is only for visual inspection and a different permit is required before commencing any work on the roof.
- If using a harness all workers accessing the roof must have current Working at Heights training.
- Parapets are not a fall arrest system unless part of a submitted SWMS.

There are two ways to access the auditorium roof space. From the roof space, the roof can be accessed.


1. Take the Schulz eastern lift to Level 2 and enter the fire stairwell. A plant key is required to enter room 2005. Walk to the sound projection room then climb the fixed rung ladder, open door (building key) into the auditorium ceiling.
2. Enter Scott Theatre on the ground level, go to back of stage area, lights can be turned on via light control panel which is on the right side as you enter backstage area. Climb stairs on western side (left hand side as you enter backstage area). Climb two flights of stairs a locked door (building key) will give you access to the roof space.

Once either door is open follow the walkway until you reach a fixed ladder. The ladder will lead to a hatch to the roof (security is required to open lock on hatch). Extend the ladder stiles once the hatch is open.



Schulz - level 2 Sound room door Stage side entrance Ladder Roof hatch Lower roof

Once on lower roof follow walkways to fixed ladder. Climb fixed vertical ladder to access upper roof.

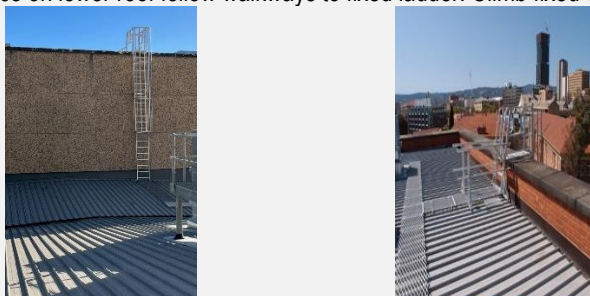

Fixed ladder Upper roof

No access to areas without walkways unless a safe system of work is in place to ensure the risk of a fall has been minimised (2012 SA WHS Regulations Part 4), this could include using industrial fall arrest harness attached to the static lines or anchor points if available.

Roof Space

There are two ways to access the auditorium roof space.

1. Take the Schulz eastern lift to Level 2 and enter the fire stairwell. A plant key is required to enter room 2005. Walk to the sound projection room then climb the fixed rung ladder, open door (building key) into the auditorium ceiling.
2. Enter Scott Theatre on the ground level, go to back of stage area, lights can be turned on via light control panel which is on the right side as you enter backstage area. Climb stairs on western side (left hand side as you enter backstage area). Climb two flights of stairs a locked door (building key) will give you access to the roof space.



Sound room door



Stage side entrance



Roof Space

No access to areas without walkways unless a safe system of work is in place to ensure the risk of a fall has been minimised (2012 SA WHS Regulations Part 4), this could include using industrial fall arrest harness attached to the static lines or anchor points if available.

Roof Details

Roof Material: Iron	No. of Roofs on Building: Two
Pitch: Near flat <5°	Roof Height (m): Main auditorium: 14m Fly gallery: Stage floor to roof top: 18m
Gutter Details: Box Gutter X	Fragile Panels / areas:
Access: Walkways X Other: Platforms X Fixed Ladders X	Parapet Details (height, construction): Auditorium roof: Unprotected East and West sides. Fly tower: Raging from 0.2-0.5m
Description of Roof Plant: Venting pipes Air Conditioners	Number: Various
Other Details:	

RISK ASSESSMENT

	Hazard	Risk	Control
Hazards	Unprotected roof edges and height of roofs – Fall hazard	Rare x Severe Medium	No access to roof unless under a work permit and a safe system of work for prevention of falls is implemented
	Walking on roof – Fall and slip hazard	Rare x Minor Low	Take care when traversing. Walk and do not run. Wear protective footwear (refer below). Implement a safe system of work for prevention of falls prior to commencing works.

Infrastructure HSW Management Sub-System

Roof Inspection Check



	Weather – Heat, rain, strong winds – Heat exhaustion, dehydration, sunburn, colds, fall hazard	Rare x Moderate Low	Do not commence works in extreme weather conditions which will adversely affect workers. Wear a hat in open sun.
	Working alone	Slight x Major High	A system to ensure lone worker's welfare, needs to be in place.
Other Information	<ol style="list-style-type: none"> The method of access to rooftop shall depend on the specific job task being undertaken and risk assessment completed prior to commencement of work and included in Job Safety Analysis (JSA) or Safe Work Method Statement (SWMS) or Safe Work Procedure (SWP) and Safe Work Instruction (SWI); Access and work on roof top when weather is clear, dry and no high winds; Footwear must be toe steel capped and comply with AS/NZS 2210 for type 1 safety footwear; Sun protection policy and procedure is in place when working outdoors; Tools to be carried in tool belt; and Plant and equipment must be well maintained and serviced regularly. 		
Instructions	<ol style="list-style-type: none"> Undertake roof access in accordance with the University of Adelaide Infrastructure Management Sub-System Roof Access Permit to be obtained prior to roof access; Ensure that tools are secured on their person or a safe work method for bringing tools to and from the task has been determined prior to commencement of job; and Do not carry out any tasks within/on an unguarded roof edge or fall hazard, unless a safe system of work is in place to ensure the risk of a fall has been minimised. 		

LIKELIHOOD TABLE	
Category	Description
Almost certain	There is an expectation that an event/incident will occur.
Likely	There is an expectation that an event/incident could occur but not certain to occur.
Slight	This expectation lies somewhere in the midpoint between "could" and "improbable"
Unlikely	There is an expectation that an event/incident is doubtful or improbable to occur
Rare	there is no expectation that the event/incident will occur

CONSEQUENCES TABLE	
Category	Description
Severe	Injury resulting in death, permanent incapacity
Major	Injury requiring extensive medical treatment, hospitalisation, or activities could result in a Notifiable occurrence.
Moderate	Injury requires formal medical treatment (hospital outpatient/doctors visit etc), activities could result in an Improvement Notice.
Minor	Injury requires first aid
Negligible	Injury requires minor first aid (e.g. band aid), or result in short term discomfort (e.g. bruise, headache, muscular aches, etc)

RISK RATING					
Likelihood	Consequences				
	Negligible	Minor	Moderate	Major	Severe
Almost Certain	Medium	High	Very High	Very High	Very High
Likely	Medium	Medium	High	Very High	Very High
Slight	Low	Medium	High	High	Very High
Unlikely	Low	Low	Medium	Medium	High
Rare	Low	Low	Low	Medium	Medium